


DIVING SPREADS

Saturation Diving System — 180m, 6-Man

180m depth	6 divers in saturation	Includes HRC	~196 m² footprint
------------	------------------------	--------------	-------------------

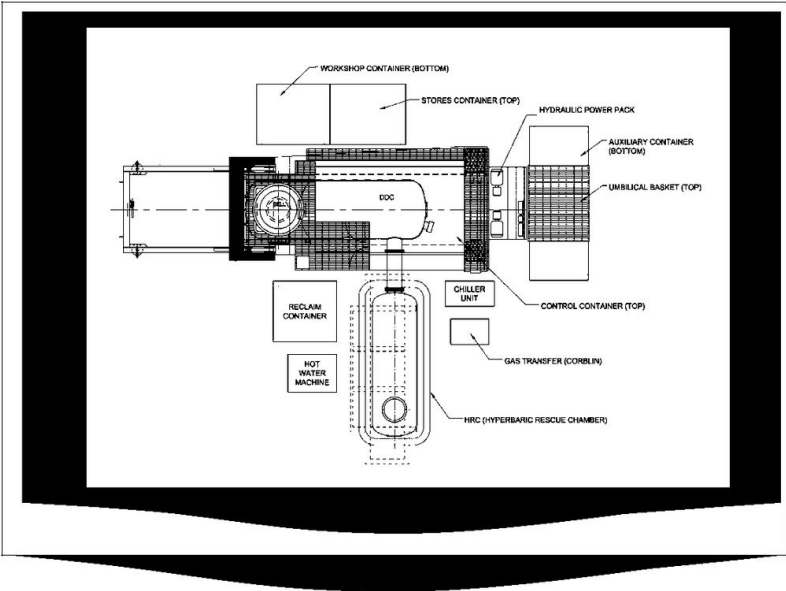

SCOPE OF WORK

A modular saturation diving system for depths to 180 metres, holding six divers in saturation for continuous back-to-back diving with its own two-man diving bell and A-frame launch and recovery. A dedicated Hyperbaric Rescue Chamber (8-person capacity) is included, and the ~196 m² footprint can be configured in-line, side-by-side or at right angles to suit deck layout.

DDC	
Working / test pressure	20 bar / 22 bar
Internal diameter	2,200 mm
Volume	21.5 m³
Diving Bell	
Design depth	180 m
Working / test pressure	18 bar / 19.8 bar
Personnel capacity	2 divers
Volume	3.5 m³
Bell Launch & Umbilical	
LARS type	A-frame, 7.5 t winch
Main umbilical length	225 m

Hyperbaric Rescue Chamber**Max working / test pressure** 20 bar / 22 bar**Personnel capacity** 8 divers**Life support** Independent**Launch methods** Crane, winch, float-out, tow-out**Power & Footprint****System power** 440–480V, 3-phase, 50/60Hz, 200 kW**Footprint** ~196 m² inclusive of auxiliary equipment